


DuraSound

TRACK & HEADER DETAILS - BULKHEAD MOUNTED

Straight door - Manual Operation (Under 3.4m high)

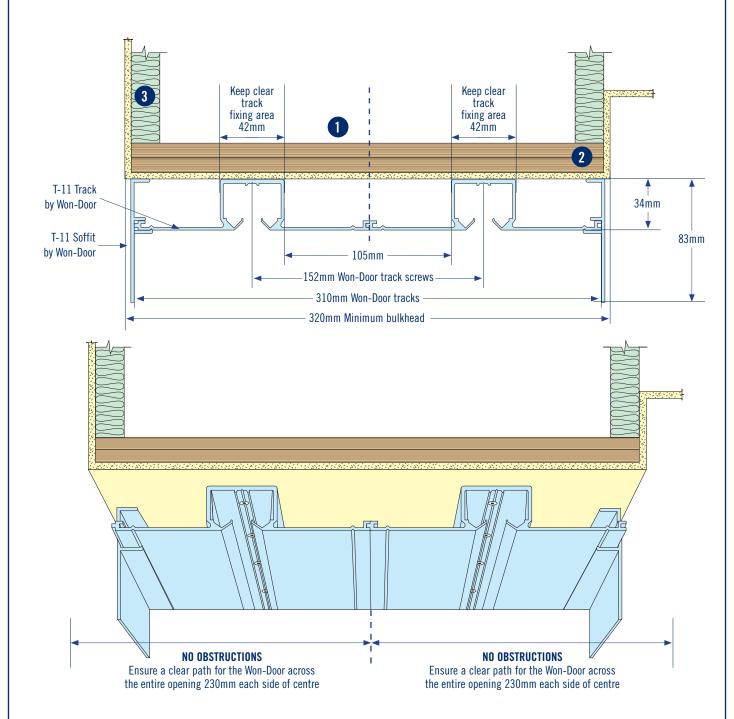

1. Plywood to be sufficently fixed into bulkhead framing to carry the weight of this door 18Kgm². By main contractor.

Note: Ensure extra fixing in stack depth areas. (Refer Jamb Details page for Stack Depth Area Calculation)

- 2. Two (2) Layers 17mm x 310mm continuous plywood, screwed and glued, to be parallel with floor. Maximum level tolerance of \pm 5mm. By main contractor.
- **3. Sound proofing:** Insulate above header as required for sound proofing "by others".

For further details contact:

Won-Door Australia Pty Ltd. Won-Door New Zealand Ltd. Tel: 1800 682 965 Tel: 0800 688 555

Email: info@won-door.com.au Email: info@won-door.co.nz




DuraSound

JAMB DETAILS - REQUIRED (Timber stud fixing behind wall linings)



BI-PARTING

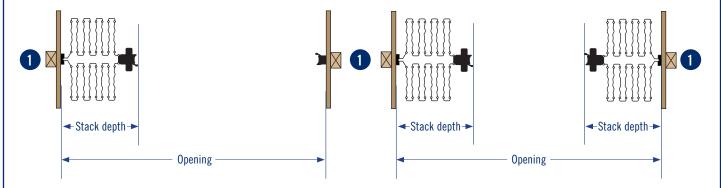


Stack Depth Ratio: 146mm per lineal metre of opening, PLUS 152mm for the lead post. NOTE. For Bi-Parting doors use half the opening width.

Stack Depth Area Calculation:

Single Parting = (Opening width (m) x 146) + 152

Bi-Parting = (1/2 Opening width (m) x 146) + 152

JAMB DETAILS - OPTIONAL (Hardwood timber jamb on face of wall linings)

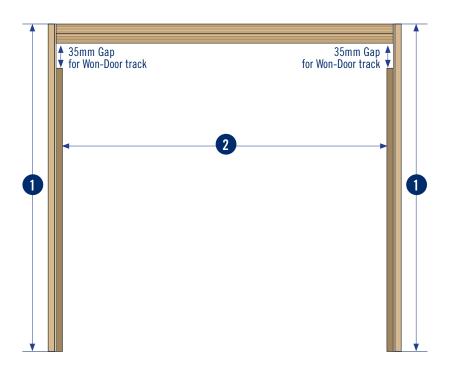

- 1. **REQUIRED:** Timber stud behind wall lining centred on header to take aluminium jamb.
- 2. **OPTIONAL:** 150x20mm Hardwood timber jamb "by others" on face of wall linings. Leave a 35mm gap from the underside of plywood header, to top of hardwood jamb.

For further details contact:


Won-Door Australia Pty Ltd. Won-Door New Zealand Ltd. Tel: 1800 682 965 Tel: 0800 688 555 Email: info@won-door.com.au Email: info@won-door.co.nz



DuraSound

FABRICATION DIMENSIONS AND LEVEL FLOORING

(BULKHEAD TRACK/HEADER)

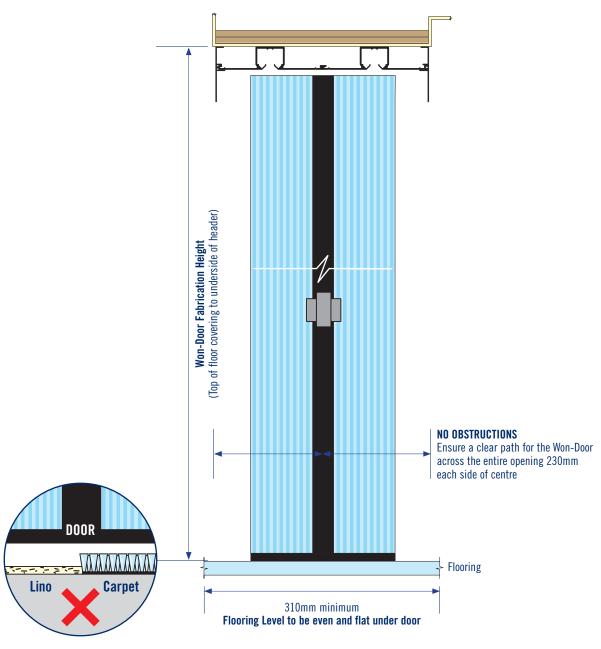



For further details contact:

Won-Door Australia Pty Ltd. Won-Door New Zealand Ltd. Tel: 1800 682 965 Tel: 0800 688 555

Email: info@won-door.com.au Email: info@won-door.co.nz