




WON-DOOR
FOLDING PARTITIONS
FIRE & ACOUSTIC SOLUTIONS

DuraSound with Stabilizer Bar

HEAD DETAILS - RECESSED TRACK

Straight door - Manual Operation
(Over 3.4m high, Max 6m high)

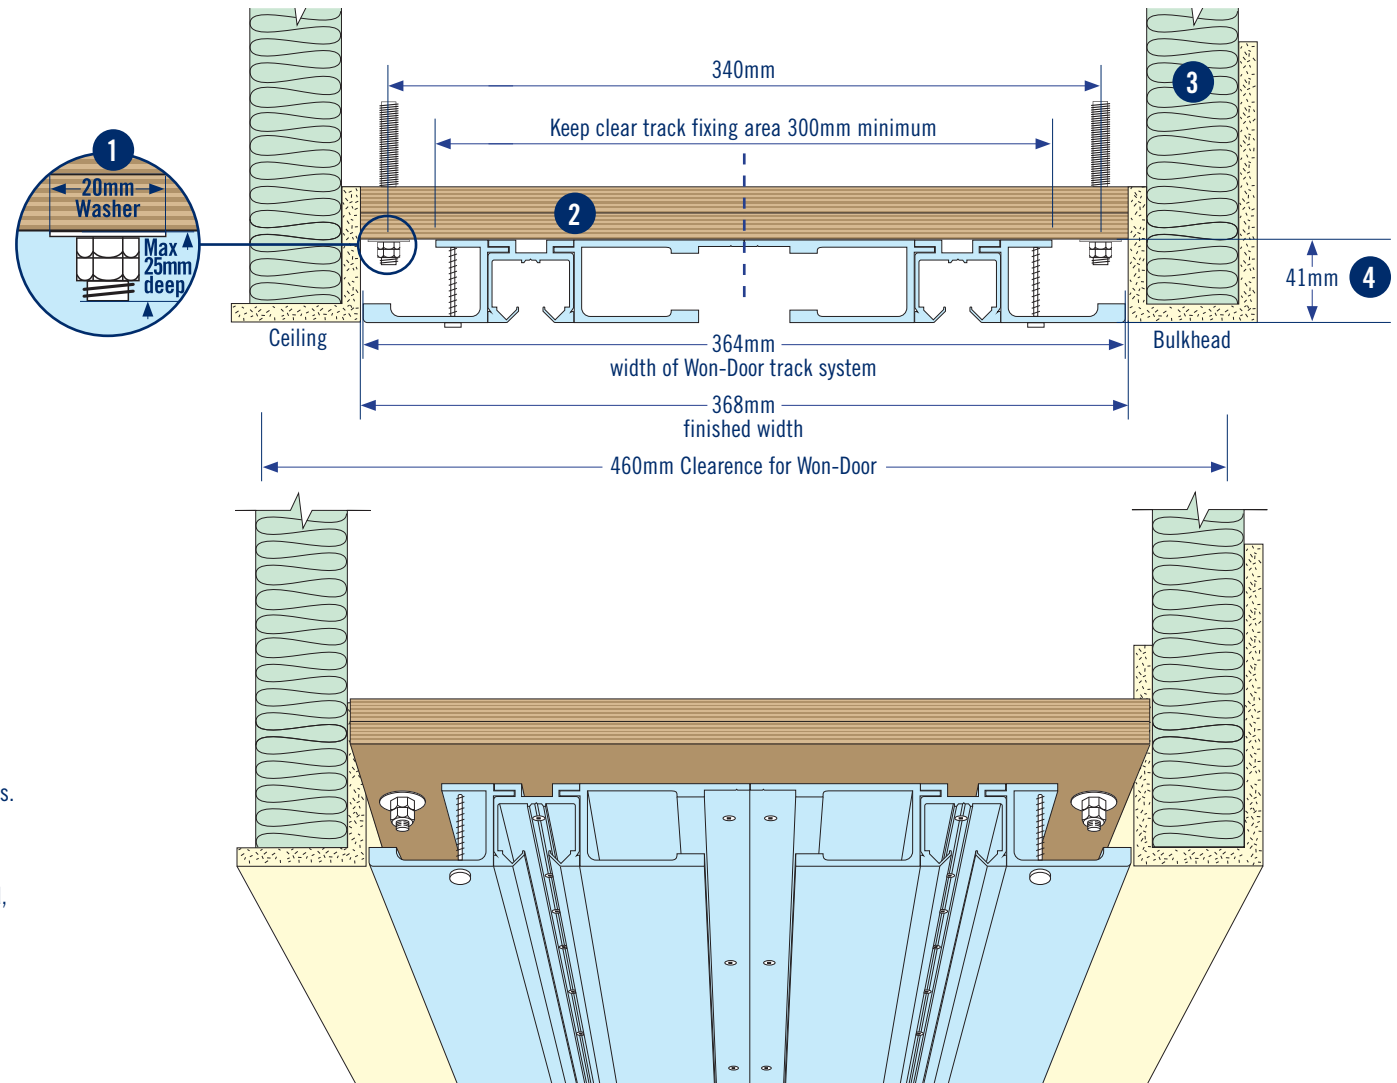

1. 10mm threaded rod with nuts and washers by main contractor.

Spacing: 600mm centres through opening, 300mm in stack depth areas.
(Refer P.3 for Stack Depth Area Calculation)

NOTE: All fixings must be kept clear of "Track Fixing Area"

2. Two (2) Layers 17mm x 368mm continuous plywood, screwed and glued, to be parallel with floor. Maximum level tolerance of ± 5 mm. By main contractor.
3. **Sound proofing:** Insulate above header as required for sound proofing "by others".
4. Underside of plywood recessed 41mm above ceiling/bulkhead

For further details contact:

Won-Door Australia Pty Ltd.

Tel: 1800 682 965

Email: info@won-door.com.au

Won-Door New Zealand Ltd.

Tel: 0800 688 555

Email: info@won-door.co.nz




WON-DOOR
FOLDING PARTITIONS
FIRE & ACOUSTIC SOLUTIONS

DuraSound with Stabilizer Bar

HEAD DETAILS - RECESSED TRACK

Straight door - Manual Operation
(Over 3.4m high, Max 6m high)

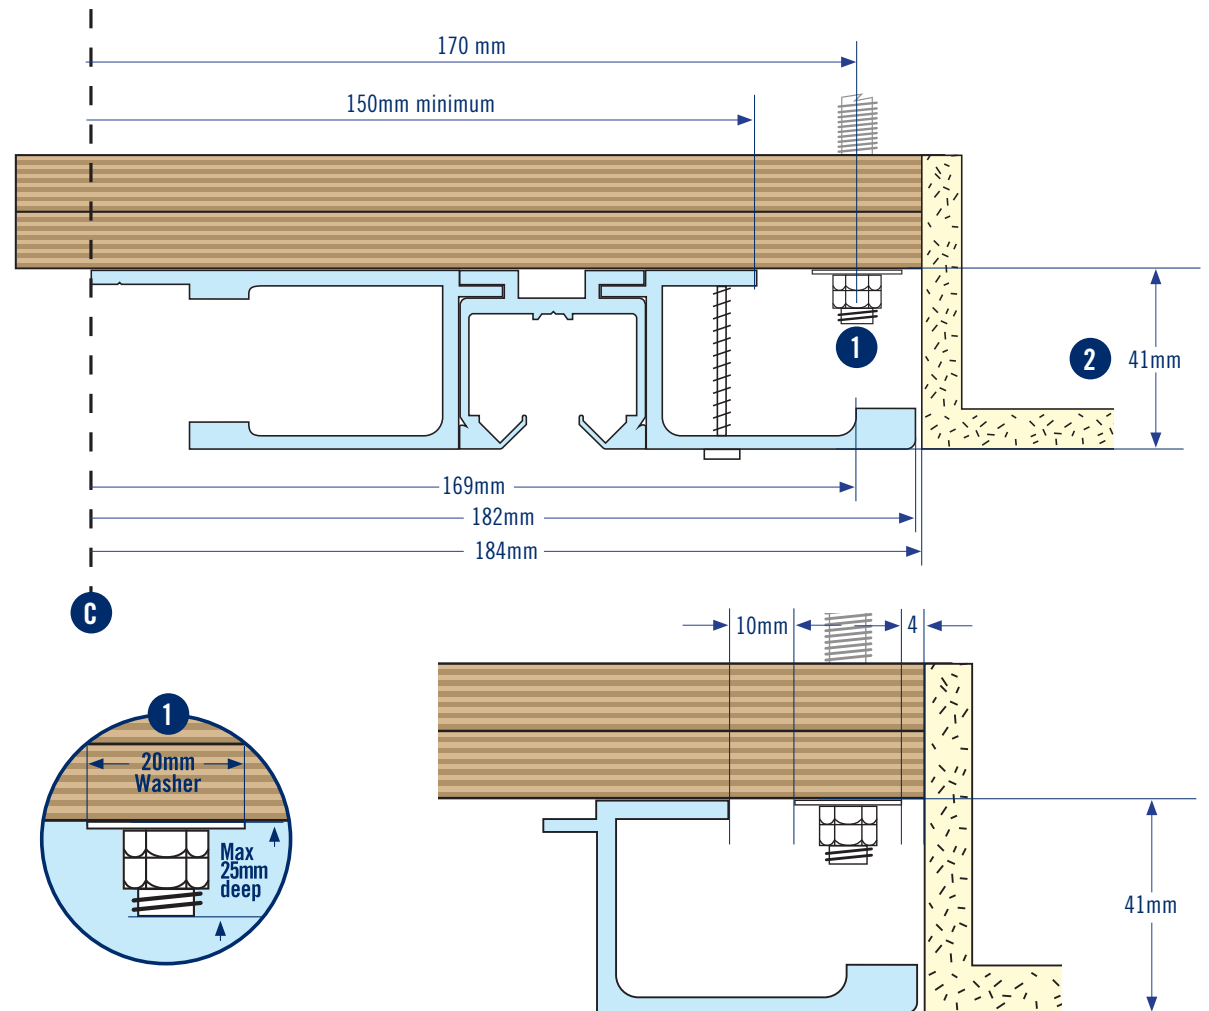

NOTES:

1. Threaded rods 340mm apart (170mm from centre). 20mm circle washer.
2. Underside of plywood recessed 41mm above ceiling.

For further details contact:

Won-Door Australia Pty Ltd.

Tel: 1800 682 965

Email: info@won-door.com.au

Won-Door New Zealand Ltd.

Tel: 0800 688 555


Email: info@won-door.co.nz



DuraSound with Stabilizer Bar

JAMB DETAILS - REQUIRED

(Timber stud fixing behind wall linings)

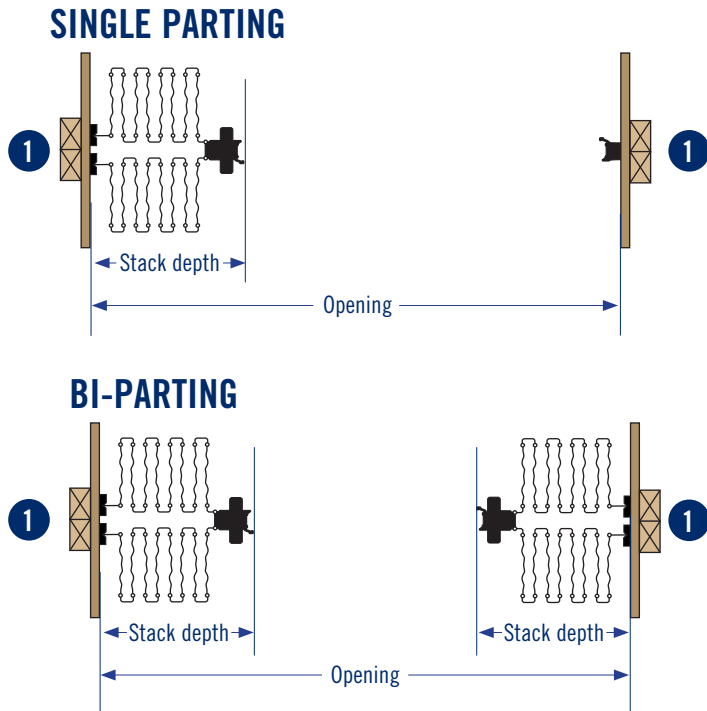

Stack Depth Ratio: 146mm per lineal metre of opening, **PLUS** 152mm for the lead post.

NOTE: For Bi-Parting doors use half the opening width.


Stack Depth Area Calculation:

Single Parting = (Opening width (m) x 146) + 152

Bi-Parting = (1/2 Opening width (m) x 146) + 152

JAMB DETAILS - OPTIONAL

(Hardwood timber jamb on face of wall linings)

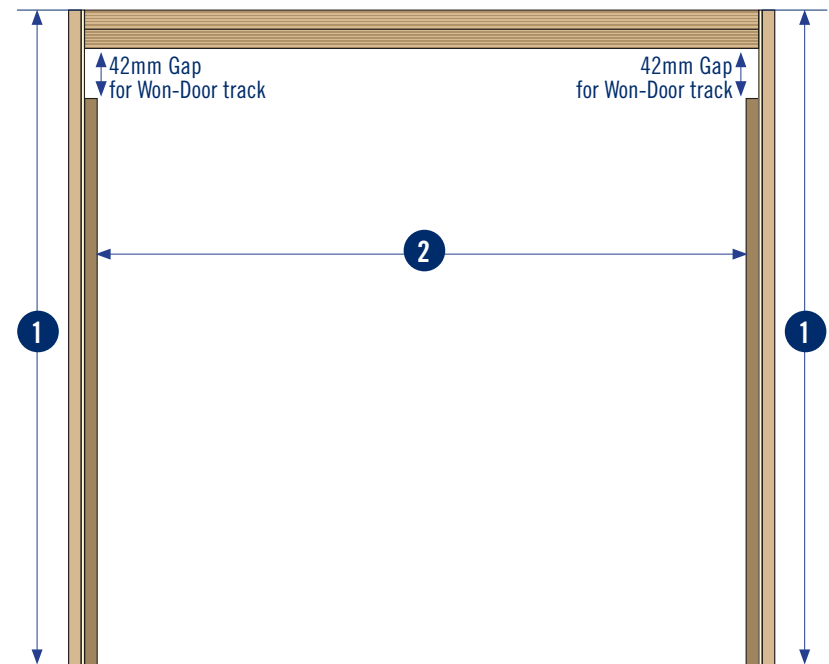

1. **REQUIRED:** Twin timber studs behind wall lining centred on header to take aluminium jamb.

2. **OPTIONAL:** 150x20mm Hardwood timber jamb "by others" on face of wall linings. Leave a 42mm gap from the underside of plywood header, to top of hardwood jamb.

For further details contact:

Won-Door Australia Pty Ltd.

Tel: 1800 682 965

Email: info@won-door.com.au

Won-Door New Zealand Ltd.

Tel: 0800 688 555



Email: info@won-door.co.nz



WON-DOOR
FOLDING PARTITIONS
FIRE & ACOUSTIC SOLUTIONS

DuraSound

FABRICATION DIMENSIONS AND LEVEL FLOORING

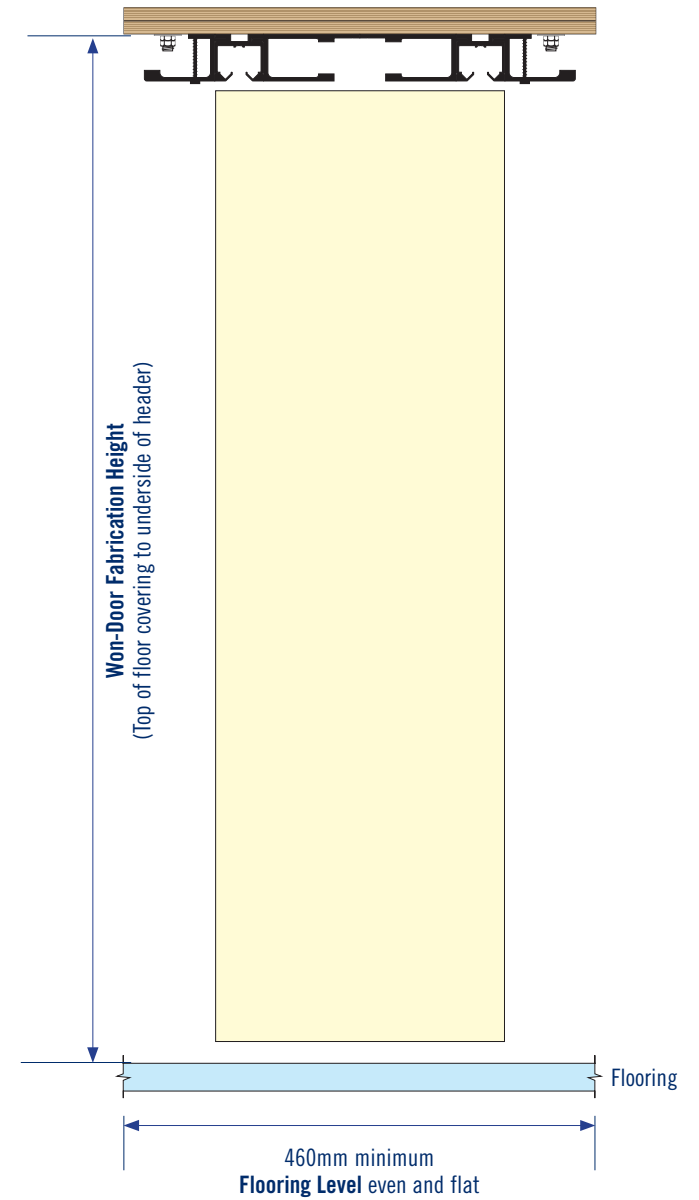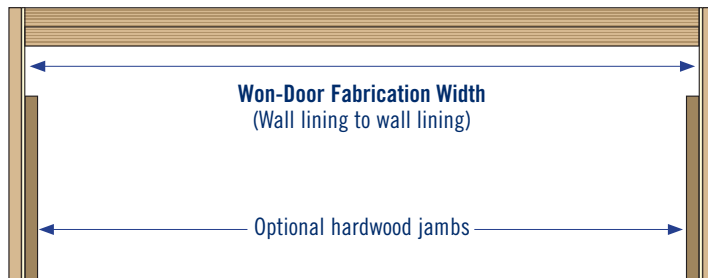

For further details contact:

Won-Door Australia Pty Ltd.

Tel: 1800 682 965

Email: info@won-door.com.au

Won-Door New Zealand Ltd.

Tel: 0800 688 555

Email: info@won-door.co.nz